

# CI-225TN

Ref: LDACI225TNS01

The LDA CI-225TN is an EN 54-24 certified 20W column loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction.

It is suitable for both indoor and outdoor thanks to its IP 66 protection, which makes it perfect for all types of environments.

**EN 54-24**



### Features of the CI-225TN speaker:

- EN 54-24 certified
- Intelligible voice and excellent sound reproduction
- Robust aluminum housing
- Includes universal swivel bracket for easy angle adjustment
- Able to be switched between 100V and 70V
- Adaptable to extreme environments
- IP66 protection



### Technical Specifications:

Model	CI-225TN
<b>Reference</b>	<b>LDACI225TNS01</b>
Max power	30 W
Rated power	20 W
Transformer	20 / 10 / 5 / 2,5W @ 100V, 10 / 5 / 2,5 / 1,25W @ 70V
SPL at 20W/1W (100Hz-10kHz, 1m)	103 dB (20W/1m) / 92 dB (1W/1m)
Frequency response	300 Hz ~15 kHz (-10 dB)
Connection	Fire-resistant cable
Dimensions (W x H x D)	165 x 150 x 344 mm
Weight	3.75 kg
Color	White (RAL9003)
IP protection grade	IP66 (B type according to EN54-24)
Speaker size	4" x 2
Material	Aluminum

**CI-225TN**

Ref: LDACI225TNS01

**Frequency response and polar diagram:**

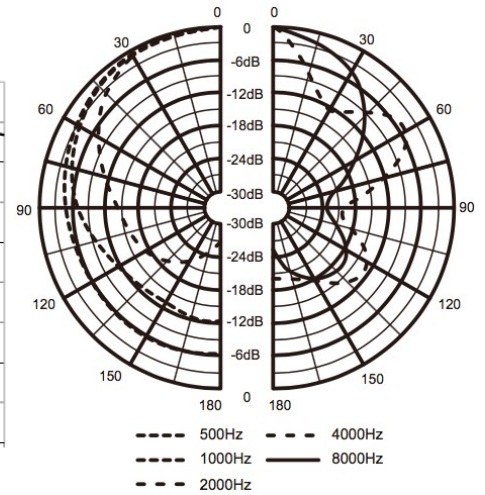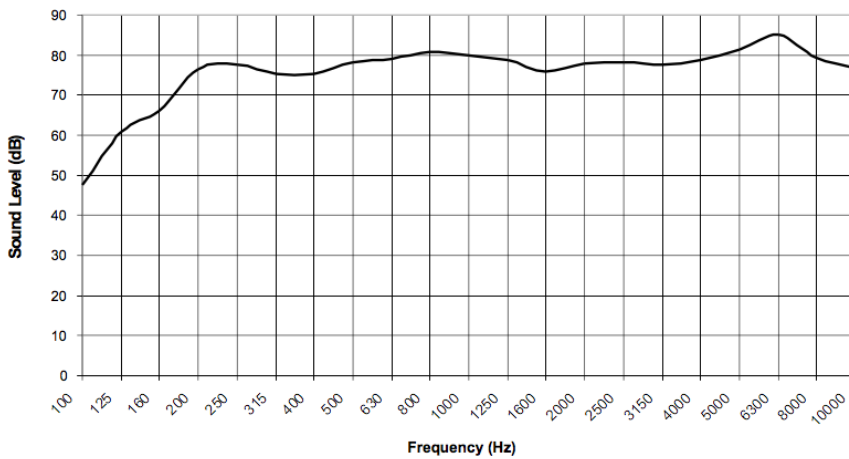

**Mechanical details:**

